

BLIK D700 CARTON SHREDDERS

APPLICATIONS:

Shredding bulky packaging such as:
Carton boxes, outer packaging, crates and polystyrene foam boxes.

Use: for reducing the volume of large carton boxes and general packaging: Carton boxes, outer packaging, crates and polystyrene foam boxes, for processing in a bale press or compactor.

Pre-shredding helps reduce volume by approximately 50%, which enables the use of small-sized bale presses and compactors or evacuation by conveyor belt or pneumatic aspiration.


The D700 can be loaded manually or automatically by conveyor belt.

This slow rotating shredder generates very little noise and dust, unlike other fast rotating models.

Can be front or top-loaded.



The sheets of carton are shredded between the rotor driver and the shredder driver. The shredded carton can then be sent directly to a press or evacuated via a conveyor belt.



Blik



BLIK -

**Waste Recovery
and Processing Equipment**

Z.I. de Chenet

91490 MILLY-LA-FORET

E.mail: blik@blik.fr


www.blik.fr

telephone:
33 (0)1 64 98 79 79

fax:
33 (0)1 64 98 79 78

page
1

BLIK D700 CARTON SHREDDER (continued)

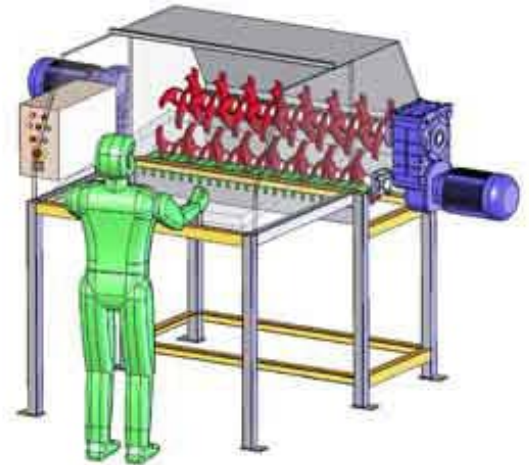


TECHNICAL ADVANTAGES

- *Very efficient, specially configured rotor blades and scraper system*
- *Wide rotors*
- *Independent rotation speeds for both rotors*
- *Removable shredding blades for easy maintenance*
- *Modular design for personalised loading*
- *Low maintenance*
- *Reduced-speed and low noise*
- *Programmable, electronic control system*
- *Automatic overload reverse*



BLIK D700 CARTON SHREDDER (continued)

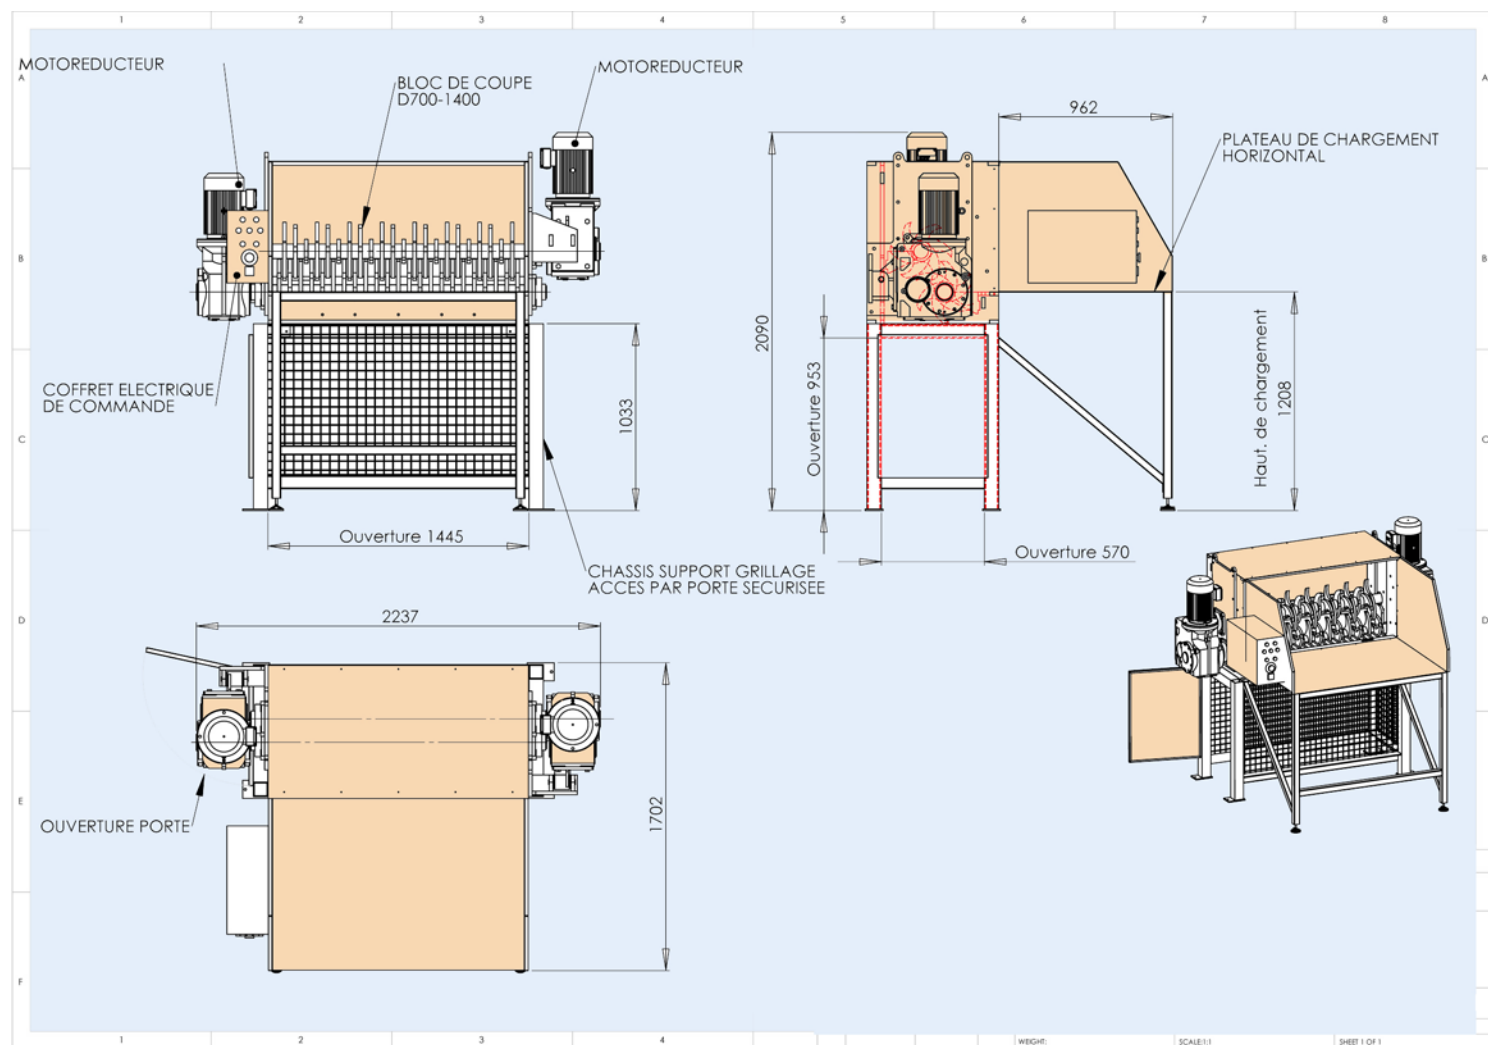

D700 Type:	1100	1400	1800
Cutting width	1100mm	1400mm	1800mm
Cutting height	700 mm	700 mm	700 mm
Number of rotors	2	2	2
Shredding rotor width	340 mm	340 mm	340 mm
Blade thickness in mm	12	12	12
Number of blades	44	44	44
Number of teeth per blade	2	2	2
Shredder rotor speed	19 to 38 t/min	19 to 38 t/min	19 to 38 t/min
Drive rotor width	500 mm	500 mm	500 mm
Drive motor	3kw	3kw	3kw
Shredding motor	5.5kw	5.5kw	5.5kw
Power	400Vtri	400Vtri	400Vtri
Line protection	25 Amp	25 Amp	25 Amp
Weight kg	1000	1200	1500
Overall height	2090mm	2090mm	2090mm
Overall width mm	1937	2237	2637
Overall depth in mm with manual feed table	1702	1702	1702
Electronic control system: Automatic Reverse-Restart-Overload stop			
Patented, quick release scrapers for easy cleaning of cutting block			
Price: standard specifications without special modifications	1 year warranty	1 year warranty	1 year warranty